

▶ KGF-9

▶ 橋式稱重傳感器
BRIDGE LOAD CELL


▶ 材質：合金鋼 不銹鋼
Materials: Alloy Steel Stainless Steel

INTERCHANGEABLE PRODUCTS



Manufacturer _____ Mode _____
Cotiinc.....CI-Lodec

Main Dimensions and Accessories
主要外形尺寸

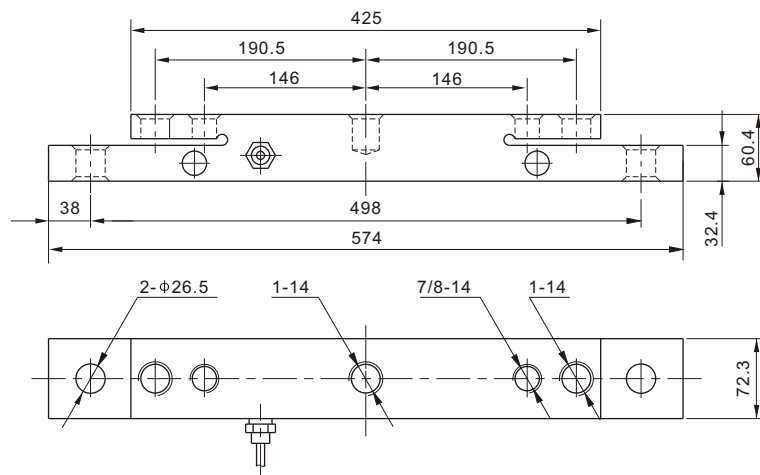

量程 **Capacity: 13.6t**

▶ 主要技术指标 SPECIFICATIONS

◇ 靈敏度 Rated Output (mV/V)	0.5±0.01	◇ 輸入電阻 Input Resistance (Ω)	385±10
◇ 非線性 Nonlinearity	±1%FS	◇ 輸出電阻 Output Resistance (Ω)	350±3
◇ 滯后 Hysteresis	±1%FS	◇ 絕緣電阻 Insulation Resistance	≥5000MΩ
◇ 重複性 Repeatability	±0.1%FS	◇ 供橋電壓 Excitation Voltage	10V(DC/AC)
◇ 蠕變 Creep (30minutes)	±0.1%FS	◇ 溫度補償範圍 Compensated Temperature Range	-10℃~+50℃
◇ 零點輸出 Zero Balance	±1.00%FS	◇ 使用溫度範圍 Operating Temperature Range	-20℃~+60℃
◇ 零點溫度系數 Temperature Effect on Zero	±0.02%FS/10℃	◇ 允許過載負荷 Safe Overload	120%FS
◇ 額定輸出溫度系數 Temperature Effect on Output	±0.02%FS/10℃	◇ 連接電纜 Cable	Φ6×12m

連接方法 Cable Color Code

Input: Red(+) Black(-); Output: Green(+) White(-)
輸入：紅(+) 黑(-)；輸出：綠(+) 白(-)