

KPE-7

稱重傳感器

LOAD CELL

材質：合金鋼 不銹鋼

Materials: Alloy Steel Stainless Steel


INTERCHANGEABLE PRODUCTS



Manufacturer _____ Mode _____

Rice Lake Weighing Systems.....RLHBB
 Revere Transducers.....SHB
 Tede-Huntieigh.....Z6
 HBM.....PW12
 Celtron.....HBB
 Cotiinc.....CI-Z6
 Totalcomp.....TZ6

Main Dimensions and Accessories
主要外形尺寸

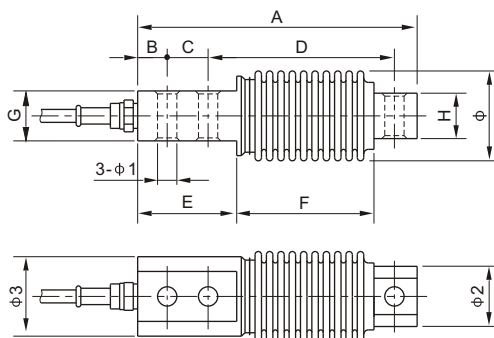

量程 Capacity kg	尺寸 Size mm											
	A	B	C	D	E	F	G	H	φ	φ1	φ2	φ3
10-500	120.0	10.0	18.0	82.0	46.0	58.0	20.0	20.0	41.0	8.2	23.0	32.0
1000	210.0	15.0	40.0	133.0	91.0	66.0	34.0	25.0	56.0	13.0	36.0	50.0

主要技術指標

SPECIFICATIONS

◇靈敏度Rated Output(mV/V)	2±0.01	◇輸入電阻Input Resistance(Ω)	385±10
◇非線性Nonlinearity	±0.02%FS	◇輸出電阻Output Resistance(Ω)	350±3
◇滯后Hysteresis	±0.02%FS	◇絕緣電阻Insulation Resistance	≥5000MΩ
◇重復性Repeatability	±0.01%FS	◇供橋電壓Excitation Voltage	10V(DC/AC)
◇蠕變Creep(30minutes)	±0.02%FS	◇溫度補償範圍Compensated Temperature Range	-10℃~+50℃
◇零點輸出Zero Balance	±1.00%FS	◇使用溫度範圍Operating Temperature Range	-20℃~+60℃
◇零點溫度系數Temperature Effect on Zero	±0.02%FS/10℃	◇允許過載負荷Safe Overload	120%FS
◇額定輸出溫度系數Temperature Effect on Output	±0.02%FS/10℃	◇連接電纜Cable	φ5×5m

連接方法Cable Color Code

Input: Red(+) Black(-); Output: Green(+) White(-)
 輸入：紅(+) 黑(-)；輸出：綠(+) 白(-)